

BINIC ABRASIVE CO.,LTD
 SHANGHAI BINIC INDUSTRIAL CO.,LTD
 Sales Office: #506,Yuanzhong Building,No.,1905
 Hongmei Road
 Shanghai,P.R.China 200233
 Tel.: 0086 21 6440 1165
 Fax.:0086 21 6485 0944
 Email: sales@binic-china.com
 Website: www.binictools.com

BINIC ABRASIVE

Company Introduction

Binic Abrasives Co.,LTD is founded 2003.We are the professional producer for abrasive tools and multi tools.

We provide High Quality Products and Services to the user; let the customer's work be safer,highly effective and protecting the environment.Carries out the ISO 9001 quality control system comprehensively,using international advanced automation production equipment and the well appointed development laboratory to ensure the best quality control and quality assurance together with optimized production pattern.

BSP is a brand name of BINIC ABRASIVE CO.,LTD.The BSP range of cutting off and grinding wheels for portable and fixed machines provide superior performance in the most stringent working environment.The product range includes state-of-the art solutions for cutting-off,grinding,and surface finishing operations on any materials related to industrial fabrication markets and DIY market.

INDEX

SAWING

01-09

REMOVING


10-13


SCRAPING

14-16

SANDING

17-20

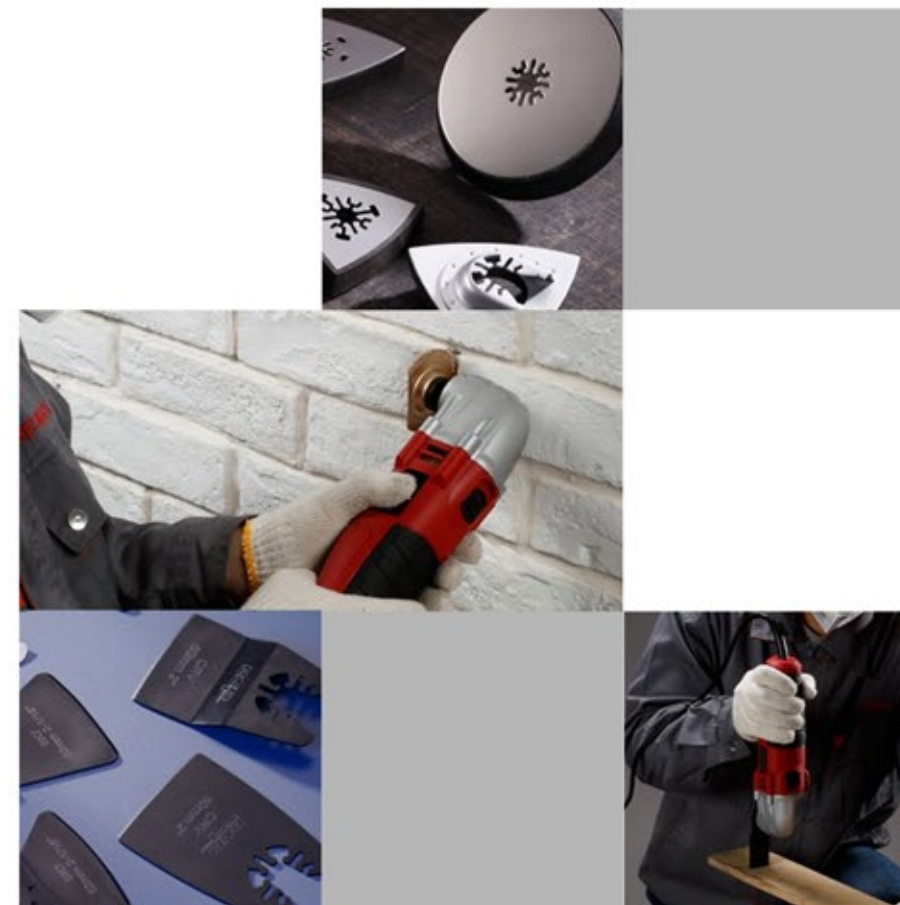

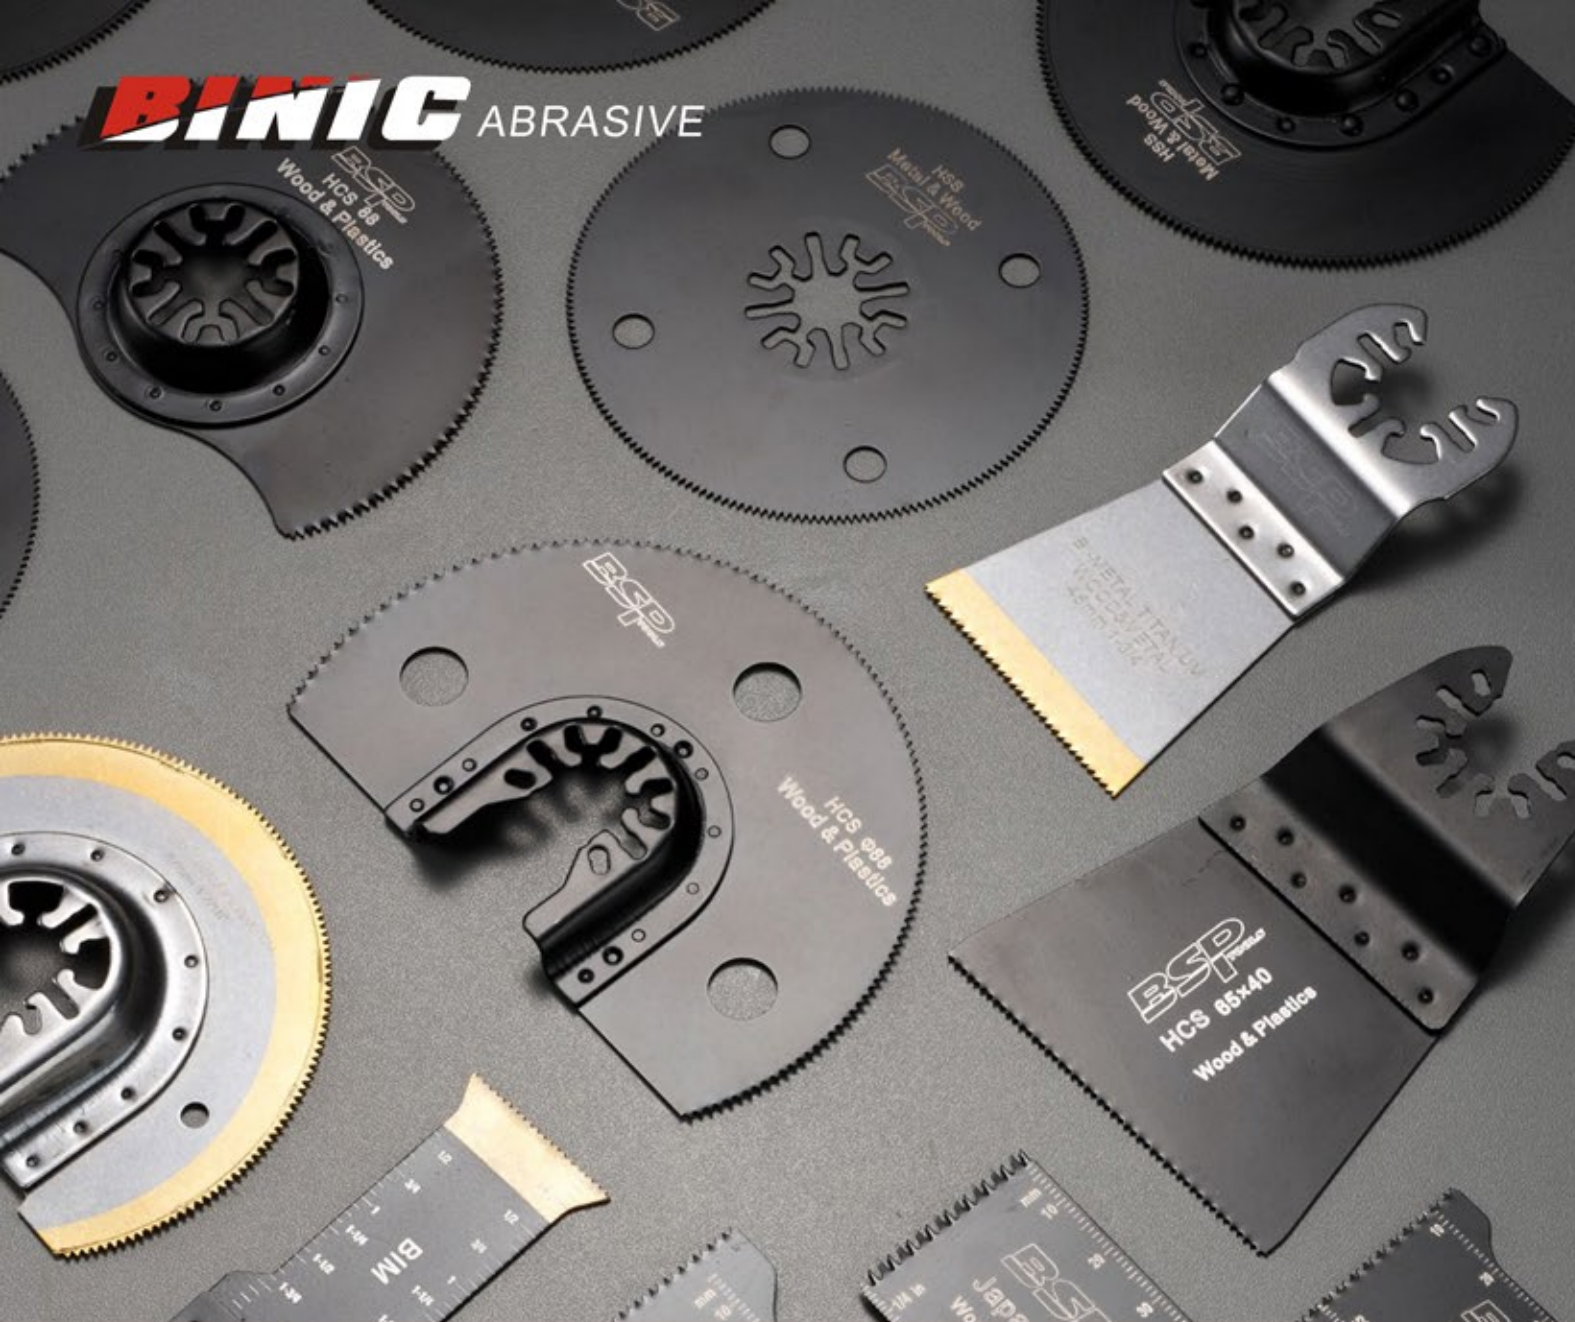









SAWING







SAWING

| TAG.NUMBER | SIZE (W x L) | RAW MATERIAL | DESCRIPTION |
|---|----------------------------|--------------|---|
|  BWU1001 | 10x40mm (3/8x1-9/16") | HCS | Saws wood,drywall and soft plastics.Enables easy plunge cuts into the material at any spot. |
|  BWU1002 | 20X40mm (25/32x1-9/16") | HCS | Saws wood,drywall and soft plastics.Enables easy plunge cuts into the material at any spot. |
|  BWU1003 | 20X50mm (25/32x2") | HCS | Saws wood,drywall and soft plastics.Enables easy plunge cuts into the material at any spot. |
|  BWU1004 | 32x40mm (1-1/4x1-9/16") | HCS | Saws wood,drywall and soft plastics.Enables easy plunge cuts into the material at any spot. |





SAWING

| TAG.NUMBER | SIZE (W x L) | RAW MATERIAL | DESCRIPTION |
|---|------------------------------|--------------|---|
|  BWU1005 | 32X50mm (1-1/4x2") | HCS | Saws wood,drywall and soft plastics.Enables easy plunge cuts into the material at any spot. |
|  BWU1006 | 40X68mm (1-9/16x2-11/16") | HCS | Saws wood,drywall and soft plastics.Enables easy plunge cuts into the material at any spot. |
|  BWU1007 | 45x40mm (1-3/4x1-9/16") | HCS | Saws wood,drywall and soft plastics.Enables easy plunge cuts into the material at any spot. |
|  BWU1008 | 65x40mm (2-9/16x1-9/16") | HCS | Saws wood,drywall and soft plastics.Enables easy plunge cuts into the material at any spot. |





SAWING

| TAG.NUMBER | SIZE (W x L) | RAW MATERIAL | DESCRIPTION |
|---|-----------------------------|--------------|---|
|  BWU1009 | 65x40mm (2-9/16x1-9/16") | HCS | Saws wood,drywall and soft plastics.Enables easy plunge cuts into the material at any spot. |
|  BWU1010 | 32x40mm (1-1/4x1-9/16") | HCS | High cutting speed and precision due to double row of Japanese-profile teeth.Saws wood up to drywall and soft plastics. |
|  BWU1011 | 45x40mm (1-3/4x1-9/16") | HCS | High cutting speed and precision due to double row of Japanese-profile teeth.Saws wood up to drywall and soft plastics. |
|  BWY1012 | 45x40mm (1-3/4x1-9/16") | HCS | High cutting speed and precision due to double row of Japanese-profile teeth.Saws wood up to drywall and soft plastics. |





● SAWING

| TAG.NUMBER | SIZE (W x L) | RAW MATERIAL | DESCRIPTION |
|---|-----------------------------|--------------|---|
|  BWF1013 | 65x40mm (2-9/16x1-9/16") | HCS | High cutting speed and precision due to double row of Japanese-profile teeth. Saws wood up to drywall and soft plastics. |
|  BWU1014 | 10x40mm (3-1/5x1-9/16") | BIM | Bi-metal teeth, offset, high cutting speed. Extremely durable and robust. For hardwood, softwood and all other wood materials - even with nails. Also very suitable for plastics and drywall. |
|  BWY1015 | 20x40mm (25/32x1-9/16") | BIM | Bi-metal teeth, offset, high cutting speed. Extremely durable and robust. For hardwood, softwood and all other wood materials - even with nails. Also very suitable for plastics and drywall. |
|  BWU1016 | 20x50mm (25/32x2") | BIM | Bi-metal teeth, offset, high cutting speed. Extremely durable and robust. For hardwood, softwood and all other wood materials - even with nails. Also very suitable for plastics and drywall. |





● SAWING

| TAG.NUMBER | SIZE (W x L) | RAW MATERIAL | DESCRIPTION |
|---|-----------------------------|--------------|---|
|  BWF1017 | 32x40mm (1-1/4x1-9/16") | BIM | Bi-metal teeth, offset, high cutting speed. Extremely durable and robust. For hardwood, softwood and all other wood materials - even with nails. Also very suitable for plastics and drywall. |
|  BWF1018 | 32x50mm (1-1/4x2") | BIM | Bi-metal teeth, offset, high cutting speed. Extremely durable and robust. For hardwood, softwood and all other wood materials - even with nails. Also very suitable for plastics and drywall. |
|  BWF1019 | 45x40mm (1-3/4x1-9/16") | BIM | Bi-metal teeth, offset, high cutting speed. Extremely durable and robust. For hardwood, softwood and all other wood materials - even with nails. Also very suitable for plastics and drywall. |
|  BWY1020 | 69x41mm (2-23/32x1-5/8") | BIM | Bi-metal teeth, offset, high cutting speed. Extremely durable and robust. For hardwood, softwood and all other wood materials - even with nails. Also very suitable for plastics and drywall. |




SAWING

| TAG.NUMBER | SIZE (W x L) | RAW MATERIAL | DESCRIPTION |
|--|----------------------------|--------------|--|
|  BWY1021 | 32x40mm (1-1/4x1-9/16") | BIM&Titanize | Broad range of application with HSS hardened teeth.Milled teeth for fine, straight cutting into hard and soft wood, aluminium plastic and no-ferrous metal. Additionally titanium coating tooth strip for longer lifetime. |
|  BWU1022 | 32x54mm (1-1/4x2-1/8") | BIM&Titanize | Broad range of application with HSS hardened teeth.Milled teeth for fine, straight cutting into hard and soft wood, aluminium plastic and no-ferrous metal. Additionally titanium coating tooth strip for longer lifetime. |
|  BWY1023 | 32x54mm (1-1/4x2-1/8") | BIM&Titanize | Broad range of application with HSS hardened teeth.Milled teeth for fine, straight cutting into hard and soft wood, aluminium plastic and no-ferrous metal. Additionally titanium coating tooth strip for longer lifetime. |
|  BWY1024 | φ87mm (3-29/64") | HSS&Titanize | Broad range of application with HSS hardened teeth.Milled teeth for fine, straight cutting into hard and soft wood, aluminium plastic and no-ferrous metal. Additionally titanium coating tooth strip for longer lifetime. |

SAWING

| TAG.NUMBER | SIZE | RAW MATERIAL | DESCRIPTION |
|--|---------------------|--------------|--|
|  BWF1025 | φ88mm (3-29/64") | HCS | For plastics, GFRP, wood, putty, brass, bronze and sheet metal up to approx. 19 gauge. |
|  BWF1026 | φ88mm (3-29/64") | HCS | For plastics, GFRP, wood, putty, brass, bronze and sheet metal up to approx. 19 gauge. |
|  BWY1027 | φ88mm (3-29/64") | HCS | For plastics, GFRP, wood, putty, brass, bronze and sheet metal up to approx. 19 gauge. |
|  BWF1028 | φ88mm (3-29/64") | HSS | For plastics, GFRP, wood, putty, brass, bronze and sheet metal up to approx. 19 gauge. |

SAWING






| TAG.NUMBER | SIZE | RAW MATERIAL | DESCRIPTION |
|--|--------------------|--------------|---|
|  BWF1029 | φ80mm (3-7/64") | HSS | For plastics, wood, putty, brass, bronze and sheet metal up to approx. 19 gauge. Ideal for work in corners. |
|  BWF1030 | φ80mm (3-7/64") | HSS | For plastics, wood, putty, brass, bronze and sheet metal up to approx. 19 gauge. Ideal for work in corners. |
|  BWU1031 | φ80mm (3-7/64") | HSS | For plastics, wood, putty, brass, bronze and sheet metal up to approx. 19 gauge. Ideal for work in corners. |







REMOVING







● REMOVING

| TAG.NUMBER | SIZE | PROCESSING | GRIT | DESCRIPTION |
|--|-------------------------------|------------------------|--------|--|
|  BRU1001 | 32.5x30mm (1-1/4"x1-3/16") | Brazing (hard alloy) | 40/50# | Carbide Technology plunge-cutting saw blade.Plunge cuts in severely abrasive materials.Rasping/filing functionality.Also excellent for removing mortar right into the most remote corners. |
|  BRF1002 | φ60mm (2-3/8") | Brazing (hard alloy) | 40/50# | Diamond-coated,also for corners and radii and for working without overcutting.Cutting line approx.2.2mm,standard design for all marble,epoxy resins and cement trass mortar. |
|  BRF1003 | φ63mm (2-31/64") | Brazing (hard alloy) | 40/50# | For cutting out defective tile joints and cutting grooves in plaster,porous concrete and similar construction materials. |
|  BRF1004 | φ88mm (3-29/64") | Brazing (hard alloy) | 40/50# | For cutting out defective tile joints and cutting grooves in plaster,porous concrete and similar construction materials. |
|  BRY1005 | φ63mm (2-31/64") | Brazing (hard alloy) | 40/50# | For cutting out defective tile joints and cutting grooves in plaster,porous concrete and similar construction materials. |

● REMOVING

| TAG.NUMBER | SIZE | PROCESSING | GRIT | DESCRIPTION |
|--|-------------------------------|------------------------|--------|---|
|  BRU1006 | φ88mm (3-29/64") | Brazing (hard alloy) | 40/50# | For cutting out defective tile joints and cutting grooves in plaster,porous concrete and similar construction materials. |
|  BRU1007 | 32.5x78mm (1-1/4x3-1/16") | Brazing (hard alloy) | 40/50# | For coarse sanding of fillers,tile adhesive,concrete,stone and wood.The finger shape,coated on both sides,is particularly suitable for artistic work. |
|  BRY1008 | 78mm (3-1/16") | Brazing (hard alloy) | 40/50# | For coarse sanding of fillers,tile adhesive,concrete,stone and wood. |
|  BRU1009 | 45x40mm (1-3/4x1-9/16") | Brazing (hard alloy) | 40/50# | For cutting out defective tile joints and cutting grooves in plaster,porous concrete and similar construction materials. |

● REMOVING

| TAG.NUMBER | SIZE | PROCESSING | GRIT | DESCRIPTION |
|---|---------------------|------------------------|--------|---|
|  BRY1010 | φ60mm (2-3/8") | Electro plated diamond | 40/50# | Diamond-coated,also for corners and radii and for working without overcutting.Cutting line approx.2.2 mm,standard design for all marble,epoxy resins and cement trass mortar. |
|  BRY1011 | φ63mm (2-31/64") | Electro plated diamond | 40/50# | For cutting out defective tile joints and cutting grooves in plaster,porous concrete and similar construction materials. |
|  BRW1012 | φ63mm (2-31/64") | Electro plated diamond | 40/50# | For cutting out defective tile joints and cutting grooves in plaster,porous concrete and similar construction materials. |
|  BRF1013 | φ88mm (3-29/64") | Electro plated diamond | 40/50# | For cutting out defective tile grout and cutting grooves in plaster,lightweight concrete and similar construction materials. |






BLINIC ABRASIVE







SCRAPING



● SCRAPING

| TAG.NUMBER | SIZE | RAW MATERIAL | DESCRIPTION |
|--|--------------------------------|-----------------|---|
|  BPF1001 | 52x72.5mm (2-3/64x2-27/32") | Stainless steel | For removal of stubborn paint, adhesive residue, carpet, tile adhesive and undercoatings. |
|  BPU1002 | 52x74.5mm (2-3/64x2-15/16") | Stainless steel | For removal of silicone or acrylic caulking in plumbing work as well as stickers. |
|  BPY1003 | 52x72.5mm (2-3/64x2-27/32") | HCS | Short version For removing silicone or acrylic joints in bathrooms and removing stickers. |
|  BPY1004 | 52x25mm (2-3/64x1") | HCS | For removal of stubborn paint, adhesive residue, carpet, tile adhesive and undercoatings |
|  BPY1005 | 52x45mm (2-3/64x1-3/4") | HCS | For removal of stubborn paint, adhesive residue, carpet, tile adhesive and undercoatings. |

● SCRAPING






| TAG.NUMBER | SIZE | RAW MATERIAL | DESCRIPTION |
|--|-----------------------------|-----------------|---|
|  BPU1006 | 38x50mm (1-31/64x2") | HCS | For use in very narrow and deep places, in channels, grooves, openings and folds. Also in mould-making, on concave forms and in convex forms. |
|  BPY1007 | 38x50mm (1-31/64x2") | HCS | Cutting soft expansion joints and window putty (sealing compound). Cutting insulation materials. |
|  BPW1008 | 68x41mm (2-11/16x1-5/8") | HCS | Broad range of applications with serrated edge. Saws cart on, polystyrene, carpet, leather, rubber and similar materials. |
|  BPW1009 | 31x77mm (1-7/32x3") | Stainless steel | For removal of stubborn paint. |






SANDING







SANDING

| BINIC ARTICLE NR. | SIZE | RAW MATERIAL | GRIT | APPLICATION |
|---|--|-----------------------|------|--|
|  BSU1001 | 53.5x53.5x37mm (2-7/64x2-7/64x1-29/64") | Stainless steel + PU | - | For use in very narrow and hard-to-reach spots, in channels, grooves, openings and slots. |
|  BSF1002 | 80mm (3-7/64") | Stainless steel + EVA | - | For very narrow openings (e.g. slats on cabinets, shutters). |
|  BSY1003 | 93mm (3-21/32") | Stainless steel + EVA | - | For very narrow openings (e.g. slats on cabinets, shutters). |
|  BSX1004 | 80mm (3-7/64") | TPU | - | For special applications such as aluminum rims and paint repairs. Use only with super-soft sanding sheets. |
|  BSF1005 | 115mm (4-1/2") | Stainless steel + EVA | - | For big opening. |

SANDING

| BINIC ARTICLE NR. | SIZE | RAW MATERIAL | GRIT | APPLICATION |
|--|--|-----------------|----------|--|
|  BS1006 | 53.5x53.5x37mm (2-7/64x2-7/64x1-29/64") | Aluminium oxide | 60#-240# | Full synthetic resin bonding, aluminum oxide. Applications, GFRP, wood, metal, solder joints, plastic, paint, filler and leather. |
|  BS1007 | 80mm (3-7/64") | Aluminium oxide | 60#-240# | Unrivalled removal rate on extremely hard surfaces such as clear coats (e.g. parquet finishes) or metal. The sanding sheet for all floor covering work due to full synthetic resin bond with high quality brown fused Alumina coating. |
|  BS1008 | 93mm (3-21/32") | Aluminium oxide | 60#-240# | Unrivalled removal rate on extremely hard surfaces such as clear coats (e.g. parquet finishes) or metal. The sanding sheet for all floor covering work due to full synthetic resin bond with high quality brown fused Alumina coating. |

SANDING

| BINIC ARTICLE NR. | SIZE | RAW MATERIAL | GRIT | APPLICATION |
|--|--------------------|-----------------|-----------------|--|
|  BS1009 | 80mm (3-7/64") | White alundum | 80/ 120/240# | Unrivalled removal rate on extremely hard surfaces such as clear coats (e.g. parquet finishes) or metal. The sanding sheet for all floor covering work due to full synthetic resin bond with high quality brown fused Alumina coating. |
|  BS1010 | 93mm (3-21/32") | White alundum | 80/ 120/240# | Unrivalled removal rate on extremely hard surfaces such as clear coats (e.g. parquet finishes) or metal. The sanding sheet for all floor covering work due to full synthetic resin bond with high quality brown fused Alumina coating. |
|  BS1011 | 115mm (4-1/2") | Aluminium oxide | 60#-240# | Unrivalled removal rate on extremely hard surfaces such as clear coats (e.g. parquet finishes) or metal. The sanding sheet for all floor covering work due to full synthetic resin bond with high quality brown fused Alumina coating. |
|  BS1012 | 115mm (4-1/2") | White alundum | 60#-240# | Unrivalled removal rate on extremely hard surfaces such as clear coats (e.g. parquet finishes) or metal. The sanding sheet for all floor covering work due to full synthetic resin bond with high quality brown fused Alumina coating. |